

Stenhøj M 2.30 F & M 2.30 F XL

Stenhøj M 2.30 F & M 2.30 F XL

2-post electro-mechanical lifts

Stenhøj M 2.30 F and M 2.30 F XL are equipped with nut breakage system and cold-rolled spindles for very long life.

The lifts have high degrees of safety in use due to the digital controls and the alarm signal when lowering the lifts.

The posts are made of strong, hot rolled profiled steel.

The lifts are equipped with arm locking devices that automatically release in bottom position.



Delivered as standard with 30-60 mm flex pads.

We offer as optional extras a large program of U- and flex pads; fixed as well as adjustable.



STENHØJ
lifting the level


The Lift is CE approved.

Technical data


Lifting capacity	3000 kg
Lifting/lowering time	50 sec.
Lifting height	2005 mm
Min. height	85 mm
Min./max. arm length	560 mm/760 mm and 830 mm/1330 mm
Motor	2 x 2.5 kW

The M 2.30 F lift has been developed for floors which are min. 210 mm thick
 The M 2.30 F XL has been developed for floors which are min. 160 mm thick.

M 2.30 F

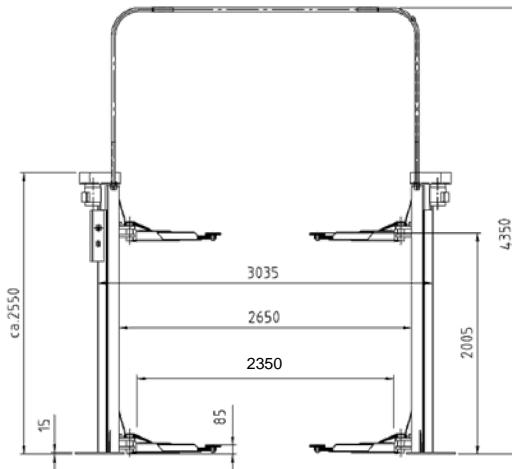

M 2.30 F XL

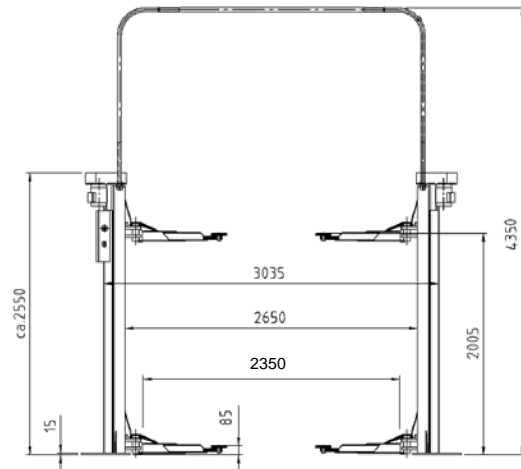

STENHØJ
 lifting the level

Stenhøj A/S
 Denmark

Tel: +45 76 82 13 30
 Fax: +45 76 82 13 31
 Mail: info@stenhoj.dk
 Web: www.stenhoj.dk

Standard colours

Dark grey RAL 7016
 Light grey RAL 7042

No liability accepted for specifications, which are subject to alteration.